


Delock Cable USB male > TTL 6 pin pin header female separate 1.8 m (3.3 V)

Description

This USB TTL converter by Delock is due to its wide temperature range most suitable for industrial applications. It supports virtual COM ports and enables optional a direct access to the interface. The converter is multifunctional compatible to the standard systems Windows, Linux and MAC. It is suitable for Embedded systems, control systems, Field Programmable Gate Array, MCUs, dongles etc.

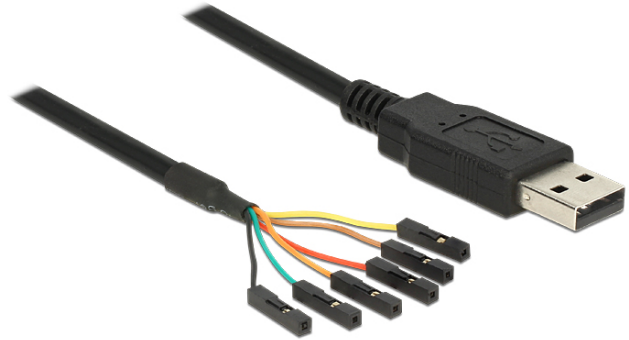

Specification

- Connector: USB 2.0 type A male > TTL 6 pin pin header separate
- Pin assignment:
 1. GND
 2. CTS
 3. VCC
 4. TXD
 5. RXD
 6. RTS
- Chipset: FTDI 232RL
- Cable gauge: 26 AWG
- Temperature range: -20°C to +80°C
- No-load current: 70 uA
- Converter: 5 V / 15 mA (VCC, GND)
- Compatible to UHCI / OHCI / EHCI controller
- LVTTTL 3.3 V (data) / 4 mA or HighLevel 12 mA
- Data rate 300 baud - 3 Megabaud
- Databit: 7 or 8
- Stopbits: 1 or 2
- Parity: none, space, even, odd, mark
- Flow control: software XON / XOFF or hardware RTS / CTS
- FIFO: 128 Byte – RX
256 Byte – TX
- Cable length: ca. 1.80 m

Item No. 83787



| | |
|-------------------|---------------|
| EAN | 4043619837878 |
| Country of origin | China |

System requirements

- Windows CE 4.2, 5.0, 6.0, Windows XP/XP-64 Vista/Vista-64/7/7-64/8/8-64, Mac OS 10.5, 10.6, Linux Kernel 2.6
- PC or laptop with a free USB type A port

Package content

- USB TTL cable
- Driver CD
- User manual

Package

- Retail Box

Images

