

## ASUS PRIME X570-P AMD X570 Socket AM4 ATX

**Merk :** ASUS

**Artikelcode:** 90MB11N0-M0EAY0


**Productnaam :** PRIME X570-P

ASUS PRIME X570-P. Processorfabrikant: AMD, Processor socket: Socket AM4, Compatible processors: AMD Ryzen 2000 Series, AMD Ryzen 3000 Series. Ondersteunde geheugen types: DDR4-SDRAM, Maximum intern geheugen: 128 GB, Geheugen slots type: DIMM. Ondersteunde opslagstationinterfaces: M.2, PCI Express 4.0, SATA III, Soorten RAID: 0, 1. Ondersteuning voor parallel processing: 2-Way CrossFireX, Maximum resolutie: 4096 x 2160 Pixels. HDMI versie: 1.4b




<b>Processor</b>		<b>Rear panel I/O ports</b>	
Processor manufacturer *	AMD	USB 3.2 Gen 2 (3.1 Gen 2) Type-A ports quantity *	4
Processor socket *	Socket AM4	Ethernet LAN (RJ-45) ports *	1
Compatible processor series *	AMD Ryzen 2000 Series, AMD Ryzen 3000 Series	PS/2 ports quantity	1
Maximum number of SMP processors	1	HDMI ports quantity *	1
Supported processor sockets	Socket AM4	HDMI version	1.4b
<b>Memory</b>		Headphone outputs	3
Supported memory types *	DDR4-SDRAM		
Number of memory slots *	4		
Memory slots type	DIMM		
Memory channels	Dual-channel		
ECC compatibility	ECC		
Supported memory clock speeds	2133, 2400, 2666, 2800, 2933, 3000, 3200, 3400, 3466, 3600, 3733, 3866, 4000, 4133, 4266, 4400 MHz		
Maximum internal memory *	128 GB		
Unbuffered memory	✓		
<b>Storage controllers</b>		<b>Network</b>	
Supported storage drive interfaces * M.2, PCI Express 4.0, SATA III		Ethernet LAN	✓
RAID support	✓	Ethernet interface type	Gigabit Ethernet
RAID levels	0, 1	LAN controller	Realtek RTL8111H
<b>Graphics</b>		Wake-on-LAN ready	✓
Parallel processing technology support *	2-Way CrossFireX	Wi-Fi *	✗
Maximum resolution	4096 x 2160 pixels	Bluetooth	✗
<b>Internal I/O</b>		<b>Features</b>	
USB 2.0 connectors *	2	Motherboard chipset *	AMD X570
USB 3.2 Gen 1 (3.1 Gen 1) connectors *	2	Audio chip	Realtek ALC S1200A
Number of SATA III connectors *	6	Audio output channels *	8 channels
S/PDIF out connector	✓	Component for *	PC
Front panel audio connector	✓	Motherboard form factor *	ATX
<b>Expansion slots</b>		Motherboard chipset family *	AMD
		Windows operating systems supported	Windows 10 x64
		PCI Express x1 slots	3
		PCI Express x16 (Gen 3.x) slots	1
		PCI Express x16 (Gen 4.x) slots	1

<b>Internal I/O</b>		<b>Expansion slots</b>	
Front panel connector	✓	Number of M.2 (M) slots	2
ATX Power connector (24-pin)	✓	<b>BIOS</b>	
Number of EATX power connectors	1	BIOS type *	UEFI AMI
CPU fan connector	✓	BIOS memory size	256 Mbit
Number of chassis fan connectors	3	ACPI version	6.2
Number of COM connectors	1	Clear CMOS jumper	✓
TPM connector	✓	System Management BIOS (SMBIOS) version	3.2
12V power connector	✓	<b>Logistics data</b>	
RGB LED pin header	✓	Harmonized System (HS) code	84733020
<b>Rear panel I/O ports</b>		<b>Weight &amp; dimensions</b>	
USB 2.0 ports quantity *	2	Width	305 mm
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity *	2	Depth	244 mm
		Height	53 mm
<b>Packaging content</b>			
Cables included		SATA	
Drivers included		✓	
<b>Other features</b>			
Weight		1 kg	

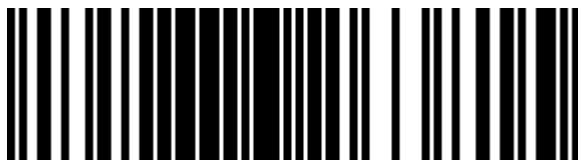

192876263815

0192876263815

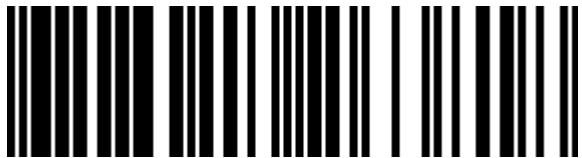

4718017263818

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.