

SAT

2-Hole Single Or Tap Line Socket (2 dB)

This SCHWAIGER® single or tap line socket is suitable for use on CATV, MATV, broadband cable TV and SAT TV systems. It can only be used as a single socket. Thanks to the special

clamping technique, the cable connections do not have to be screwed.



ARTICLE INFORMATION

Article Nr
EAN

DSE300 011
4004005300079



Last updated: 23.03.2016




FEATURES (DSE300 011)

- hinged clamp for fastening the outer conductor
- clamping technology for screwless fastening of the inner conductor (∅ 0.8 to 1.3 mm)
- crimping fastener for plaster inserts (55mm)
- standards are found in conformity declaration (Support & Service)

TECHNICAL DATA

| | |
|---------------------|--|
| Norm/Classification | class A |
| Connections | 1x F jack 1x IEC connector |
| Connections (input) | 1x detachable contact clamping spring |
| Frequency range | 950 - 2150 MHz (SAT) 5 - 862 MHz (TV / radio) |
| Isolation | > 26 dB (terrestrial/SAT) |
| Tap loss | 1 - 2 dB |
| Mounting depth | 22 mm |
| Material of product | aluminium die cast corrosion-protected |
| packaging | carton |

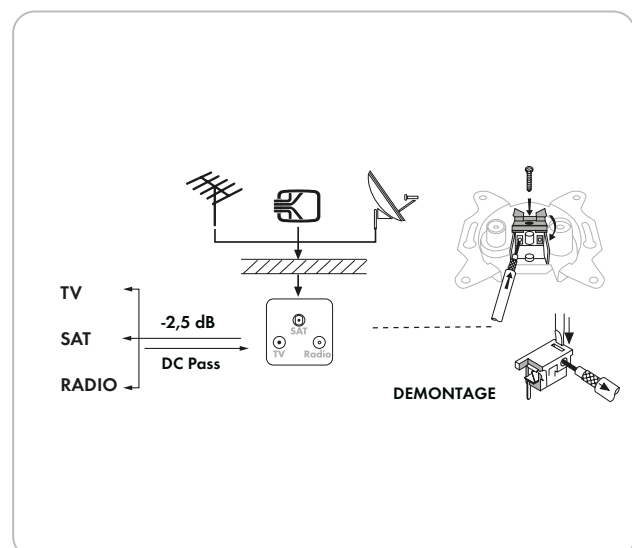

Last updated: 23.03.2016