


Delock PCI Express Card > 1 x internal NVMe M.2 PCIe / 1 x internal SFF-8643 NVMe – Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by one M.2 slot. One M.2 module in 2280, 2260, 2242 or 2230 format can be connected. Furthermore e.g. one SSD with U.2 interface can be connected by using an optional cable. Only one interface can be used, if both are occupied only the M.2 slot can be used.

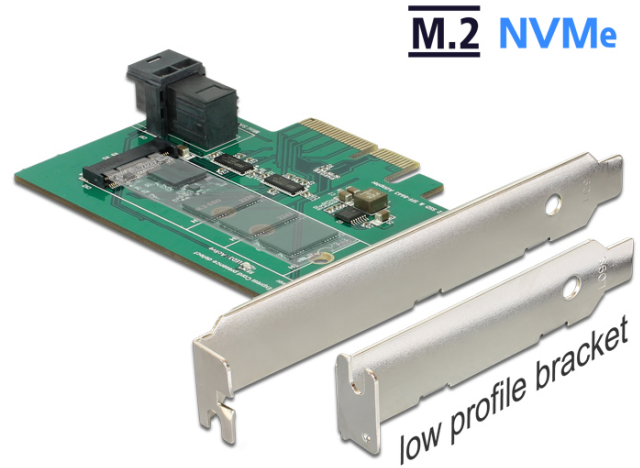

Specification

- Connector: internal:
 - 1 x 67 pin M.2 key M slot
 - 1 x PCI Express x4, V3.0
 - 1 x 36 pin SFF-8643 female
- Interface: PCIe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- Bootable, from UEFI version 2.3.1 (M.2 slot)
- Maximum output current: 4 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- LED indicator
- Power supply via PCI Express
- Supports NVM Express (NVMe)

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.2
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- 3 x fixing screw
- User manual

Item no. 89517


EAN: 4043619895175

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images

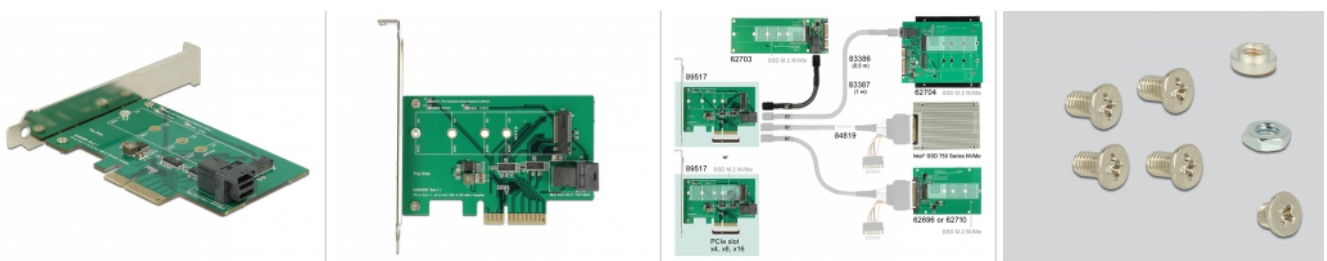

General	
Function:	bootable
Supported operating system:	Linux Kernel 3.2 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
LED indicator:	power and activity
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Interface	
Internal:	1 x 67 pin M.2 key M slot 1 x PCI Express x4, V3.0 1 x 36 pin SFF-8643 female
Technical characteristics	
Maximum current:	4 A
Physical characteristics	
Slot bracket:	low profile standard