

ZYXEL

Zyxel XGS1935-52 Managed L2+/L3 Gigabit Ethernet (10/100/1000)

Merk : Zyxel

Artikelcode: XGS1935-52-EU0101F

Productnaam : XGS1935-52

- 10GbE uitgangen Verwerkt de nieuwste toepassingen met hoge bandbreedte met gemak
 - NebulaFlex Beheer uw netwerk met de licentievrije Nebula-cloudmodus of standalone-modus
 - PoE+ 24/48 x GbE PoE+ poorten, met een energiebudget tot 375W
 - Geavanceerde functie Statische routing, VLAN, QoS, IGMP Snooping, LAG, IPv6 enzovoort via webgebaseerde interface
 - Stille werking Dankzij de ingebouwde slimme koeltechnologie kan de switch ultrastil werken
- XGS1935-52 - 48-port GbE Lite-L3 Smart Managed Switch met 4x 10G Uplink


Zyxel XGS1935-52 Managed L2+/L3 Gigabit Ethernet (10/100/1000):

Met behulp van 10GbE Uplink Switch met redelijke prijs
Met Gigabit connectiviteit plus vier 10GbE uplinks is de XGS1935 serie een ideale optie voor diegenen die behoefte hebben aan basisfuncties, eenvoudiger beheer en een meer redelijke prijs om hun netwerken te upgraden en netwerkefficiëntie te garanderen voor continue bedrijfsproductiviteit.



Management features		Multicast features	
Switch type *	Managed	Multicast support	✓
Switch layer	L2+/L3	Design	
Quality of Service (QoS) support	✓	Rack mounting *	✓
Web-based management	✓	Performance	
Cloud-managed	✓	Internal memory	512 MB
Traffic classification	✓	Flash memory	32 MB
Traffic shaping	✓	Mean time between failures (MTBF)	919583 h
ARP inspection	✓	Power	
Configuring Location Settings (CLI)	✓	Power source *	AC
System event log	✓	Power supply included *	✓
Ports & interfaces		AC input voltage	100 - 240 V
Basic switching RJ-45 Ethernet ports quantity *	48	AC input frequency	50/60 Hz
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Power consumption (typical)	24.7 W
SFP+ module slots quantity	4	Power consumption (max)	45.6 W
Network		Power protection features	Surge protection
Networking standards *		Power over Ethernet (PoE)	
10G support *	✓	Power over Ethernet (PoE) *	✗
VLAN support	✓	Operational conditions	
Data transmission		Operating temperature (T-T)	-20 - 50 °C
Switching capacity *	176 Gbit/s	Storage temperature (T-T)	-40 - 70 °C
Forwarding rate	130.9 Mpps	Operating relative humidity (H-H)	10 - 90%
MAC address table *	16000 entries	Heat dissipation	155.594 BTU/h
		Weight & dimensions	
		Width	440 mm
		Depth	270 mm

Data transmission		Weight & dimensions	
Jumbo frames support	✓	Height	43 mm
Packet buffer memory	1.5 MB	Weight	3.7 kg
Security		Packaging content	
DHCP features	DHCP client, DHCP relay	Cables included	AC
IGMP snooping	✓	Rack mount kit	✓

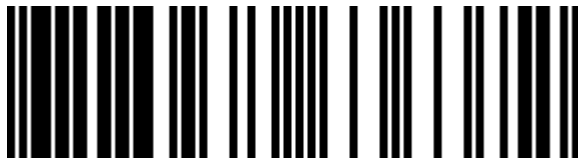

4718937636372

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 07-DEC-2024. Prints or copies of Information are only valid on the printed Publication date